



**UF EGO**  
Axolight lab

Ceiling or wall lamp with metal and natural brass frame.  
The lighting source can be adjusted.  
Built-in dimmable LED light source.

Typology: spotlight

**Ratings**


- Built in **LED** module
- CCT 3000 K
- diffused beam
- Surface installation over holes
- Supply voltage 35.2Vdc
- Switch mode: on-off
- Brass body

Lb 1.10 ft<sup>3</sup> 0.14

Product code composition

**EGO**

| Type | Article  | Colours          | Finishings | Source  |
|------|----------|------------------|------------|---|
| UF   | EGO X 30 | OT natural brass | XX         | LED 1 x 8.8W - 250 mA<br>35,2Vdc<br>diffused - <b>3000K</b> |

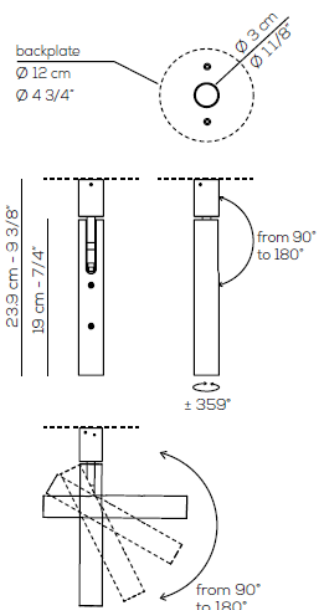

DRY LOCATION CR180 **LED** ~1220 lm ~139 lm/W

example composition code UF EGO X 30 OT XX LED

driver to be priced separately

Available colors



OT  
Natural brass

UFEGOX300TXXLED

CUSTOMER \_\_\_\_\_

NOTES \_\_\_\_\_

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all built in LED luminaires is based on nominal ratings of the LED sources.  
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.