



UF EGO P
Axolight lab

Ceiling or wall lamp with metal and natural brass frame.
The lighting source can be adjusted.
Built-in dimmable LED light source.

Typology: spotlight

Ratings

- Built in **LED** module
- CCT 3000 K
- diffused beam
- Surface installation over holes
- Supply voltage 9Vdc
- Switch mode: on-off
- Brass body

Lb 1.10 ft³ 0.14

Product code composition

EGO


Type	Article	Colours	Finishings	Source
UF	EGO P 30	OT natural brass	XX	LED 1 x 3.2W - 350 mA 9Vdc diffused - 3000K



DRY LOCATION CR180 **LED** ~334 lm ~104 lm/W

example composition code UF EGO P 30 OT XX LED

driver to be priced separately

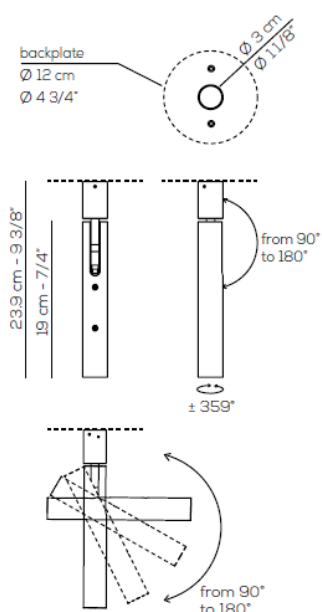

Available colors



OT
Natural brass

UFEGOP300TXXLED

CUSTOMER _____

NOTES _____

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all built in LED luminaires is based on nominal ratings of the LED sources.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.