

USULA180 - recessed

Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminium.
Available in several colours and sizes.
Available with sound absorbing panel option.




Typology: SUSPENDED LAMP

Ratings

- Built in **LED** module
- CCT 3000 K or 2700K
- Downlight or uplight
- Surface installation over holes (cable grippers) and in ceiling cut-out (recessed canopy)
- Power supply: 120 277 Vac
- Switch mode on-off
- Dimmable 1-10V LED driver (remote)
- Painted aluminium profile 23 x 23 mm
- Opalescent diffuser

Downlight or uplight mounting.

lb 23.15 ft³ 21.97

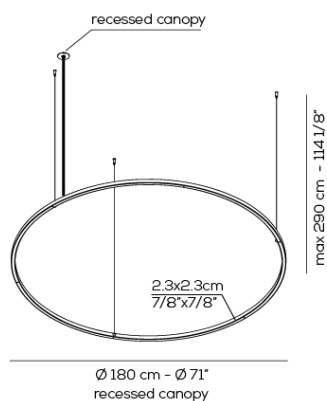

Product code composition

U-LIGHT / recessed suspension / DRIVER INCLUDED

Type	Article	Colours	Version	Source
US	ULA 180 LED	AN anthracite grey	IN recessed canopy	LED 123W - diffused beam 3000K*, 2700K
		RU rust brown		

	DRY LOCATION	CRI90	120/277VAC		LED	9800 lm*	88 lm/W
--	--------------	-------	------------	--	------------	----------	---------

hole Ø 4,5 cm - 1 3/4" / min depth 10 cm - 3 7/8"

example composition code | **US** | **ULA180LED** | **RU** | **IN** |


-for optional drivers or dimming technology please refer to our pricelist or contact our representatives

-sound absorbing option upon request- for more information see www.axolight.eu/u-light/u-light-sound-absorbing.pdf

Available colors



AN
Anthracite
grey



RU
Rust brown



Sound
absorbing
option upon
request

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

USULA180LED _ _ IN

CUSTOMER _____

NOTES _____

Luminous flux (lm) and efficacy (lm/W) for all built-in LED luminaires is based on nominal ratings of the LED sources.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.